

GF-4

Miniature Filament Fixture


Ideal for testing filament or extremely fine, flexible wire up to 0.8 mm (0.03 in) diameter. Grip includes a 11 mm (0.43 in) diameter snubber which is part of a precision machined swiveling fixture that ensures specimen alignment with the force when load is applied.

Capacity

250 N, 56.25 lbf

Packaging

Includes upper and lower grip. Top and Bottom Grip may be ordered separately.

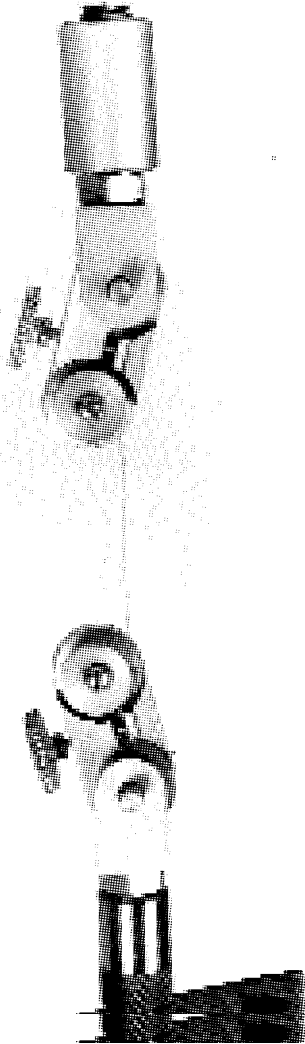

Note: The GF-4 is supplied with the following adapters for mounting to some force gauges, loadcells and test stands.

	Part Number
Coupling, 1/4-20F x 5/16-18F	17056
Coupling, 1/4-20F x #10-32F	17057
Adapter, 1/4-28 x 3/8-16	21046-1
Adapter, #10-32 x 3/8-16	21046-2

Note: See Grip Adapter Section (Page 105) for adapters required to fit force gauges, loadcells and test stands.

Ordering Information

Model	Part No.	Description
GF-4	GF4	Miniature Filament Fixture - 250 N (56.25 lbf)
GF-4	GF4-TOP	Top Only, GF-4 (1/4-20M)
GF-4	GF4-BOT	Bottom Only, GF-4 (3/8-16F)