

Sample Diameter	Part Number	Packaging	Mounting Size
1 mm (0.04 in)	01/0887	Upper & Lower	15.85 mm (5/8 in) Eye End
N/A	ML4244	Single Grip	#10-32F
N/A	ML1821	Upper & Lower	#10-32F
N/A	ML1949	Single Grip	#10-32F
14 to 4 Gauge Wire	ML1785	Single Grip	5/16-18F
0.8 mm (0.31 in)	GF4	Upper & Lower	(T) 1/4-20M, (B) 3/8-16F
N/A	GF10	Upper & Lower	(T) 1/4-20M, (B) 3/8-16F
N/A	GF3	Upper & Lower	(T) 1/4-20M, (B) 3/8-16F
1.6 mm (0.06 in)	01/1608	Upper & Lower	15.85 mm (5/8 in) Eye End
5 mm (0.2 in)	01/1829	Upper & Lower	15.85 mm (5/8 in) Eye End
N/A	ML1997	Single Grip	5/16-18F
9.5 mm (0.37 in)	GF5	Upper & Lower	(T) 1/4-20M, (B) 3/8-16F
6 mm (0.24 in)	GPS/0014/00	Upper & Lower	15.85 mm (5/8 in) Eye End
N/A	01/1139	Upper & Lower	31.7 mm (1-1/4 in) Eye End

ML-4244

Wrapped Wire Connector Grip

Designed to facilitate the testing of wrapped wire connections and terminations. The grip is formed in an "L" shape that can be notched by the user to any desired dimension to accommodate a connection post. During a test, the fixture is slipped over the terminal post below the wire wrap. When a tension load is applied, the grip engages the wrap and pulls it off the post.


Capacity

130 N, 30 lbf

Packaging

Includes upper and lower grip.

Note: See Grip Adapter Section (Page 105) for adapters required to fit force gauges, loadcells and test stands.

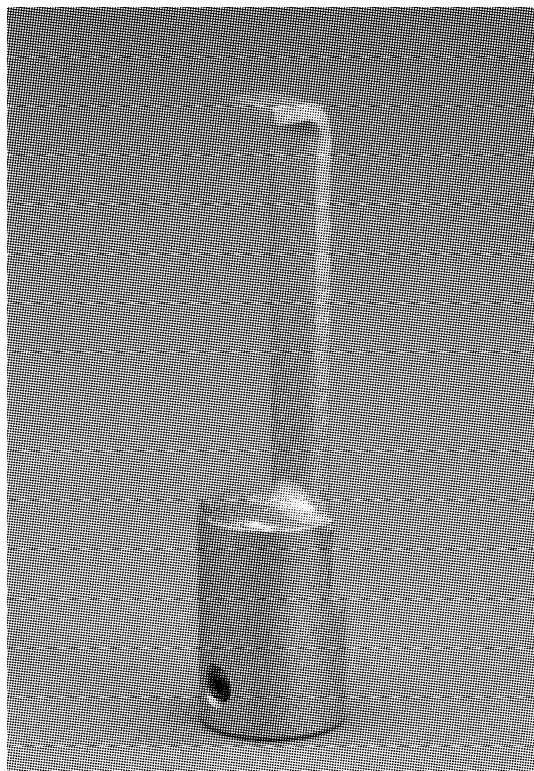

Wire Analysis
Fixtures

Ordering Information

Model	Part No.	Description
ML4244	ML4244	Wrapped Wire Connector Grip - 130 N (30 lbf)